




FS33210

ROPE POSITIONING LANYARD

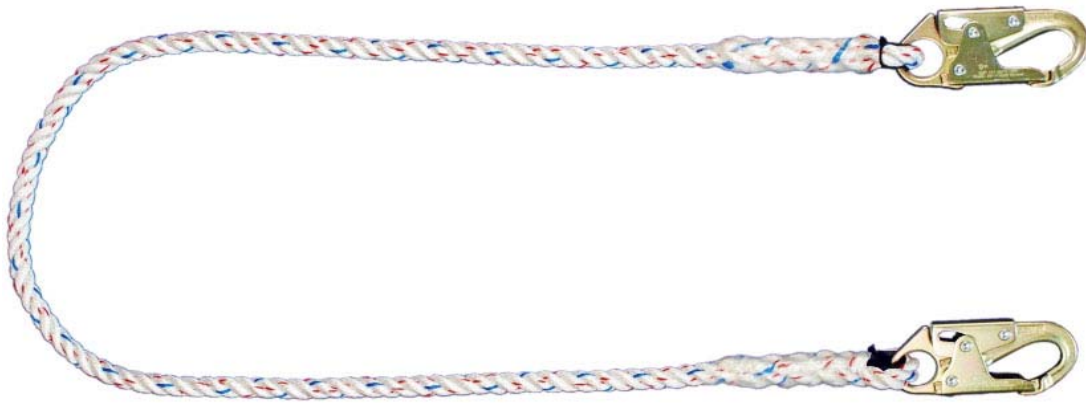

Description	Rope positioning lanyard with 2 double action lock and 0,75" opening hooks,
Attachment Point	2 safety hooks
Materials	5/8" Polydac rope breaking point >8000 lbs Safety hooks Hooks in sheet alloy steel, heat treated, 0,75" opening, double locking function, break load 5000 lbs. Gate rated at 3600 lbs
Weight Capacity	- 310 lbs
Length	- 6 Feet
Applicable Standards	- Meets OSHA 1926-502, ANSI Z359.1-2007, ANSI A10.32 2004